





XT-84M/W

Main Features

- MPEG-4/MJPEG Compression Format
- Power over Ethernet available
- 2-way Audio
- Support cell phone/PDA/3GPP
- Dual Streaming
- SDK for Software Intergration
- Wireless available
- Alarm I/O 1 Input/1 Output



Interface

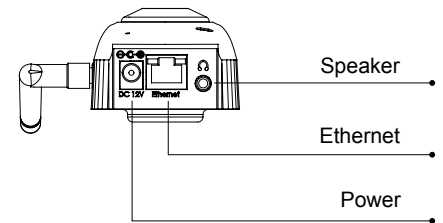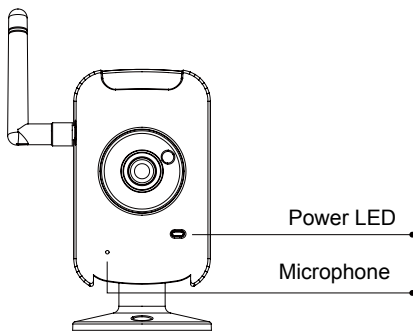

Unit: mm

Specifications

Hardware	
CPU	ARM 9, 32 bit RISC
RAM	64MB
ROM	8MB
Image sensor	1/4" CMOS
Sensitivity	1.5 lux @ F2.0
Lens Type	4.0 mm, F 2.0
Audio Out	1 (3.5 mm Phone Jack)
Power Consumption	LAN: DC 12V, 0.2A WLAN: DC 12V, 0.25A
Operating Temperature	-10°C~45°C
Dimensions	59 (mm)*93.7 (mm)*45.5 (mm)
Weight	180g
Network	
Ethernet	10/ 100 Base-T
Wireless	802.11b/g
Wep	64/128 bit
Network Protocol	HTTP, TCP/ IP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, 3GPP, UPnP

System	
Video Resolution	1280x1024, 640x480, 320x240, 160x120
Video adjust	Brightness, Contrast, Exposure, Sharpness, AGC, Night Mode
Dual Streaming	Yes
Image snapshot	Yes
Full screen monitoring	Yes
Compression Format	MPEG-4, MJPEG
Video bit rate adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered action	Mail, FTP,
Pre/ Post alarm	Yes, configurable
Security	Password protection
Firmware upgrade	HTTP mode, can be upgraded remotely
Simultaneous connection	Up to 10
Audio	Yes, 2-way (Duplex Support)
Client system requirements	
OS	Windows 2000/2003, XP, Vista, IE 6 or above
Hardware	
Suggested	Intel-C 2.8G, RAM: 512MB, Graphic card: 64MB
Minimum	Intel-C 1.6G, RAM: 256MB, Graphic card: 32MB

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE